

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/GB05/001087

International filing date: 22 March 2005 (22.03.2005)

Document type: Certified copy of priority document

Document details: Country/Office: GB
Number: 0406887.0
Filing date: 26 March 2004 (26.03.2004)

Date of receipt at the International Bureau: 18 May 2005 (18.05.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse



PCT/GB 2005 / 0 0 1 0 8 7

PCT/GB 2005 / 0 0 1 0 8 7



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.


Signed

Stephen Hordley

Dated

29 April 2005

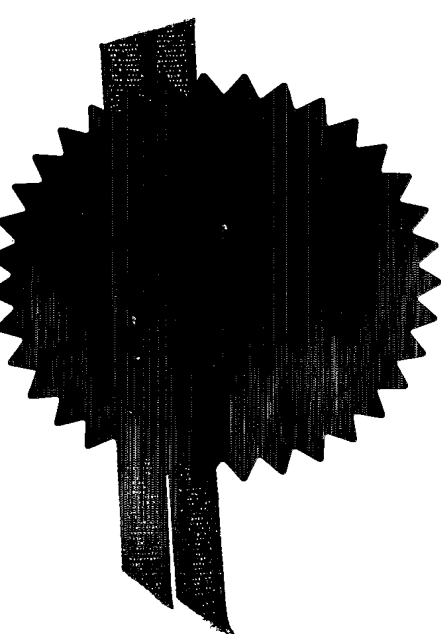






29MAR04 E884354-1 D02805
P01/7700 0.00-0406887.0 ACCOUNT CHA

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

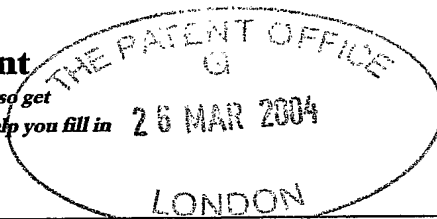

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

M04B101/ASB

2. Patent application number

(The Patent Office will fill this part in)

26 MAR 2004

0406887.0

3. Full name, address and postcode of the or of each applicant (underline all surnames)

The BOC Group plc, Chertsey Road, Windlesham, Surrey, GU20 6HJ

Patents ADP number (if you know it)

884627002

7975949001

If the applicant is a corporate body, give the country/state of its incorporation

England

4. Title of the invention

GEAR ASSEMBLY

5. Name of your agent (if you have one)

Andrew Steven BOOTH

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

The BOC Group plc, Chertsey Road, Windlesham, Surrey, GU20 6HJ

Patents ADP number (if you know it)

7975949001

6. Priority: Complete this section if you are declaring priority from one or more earlier patent applications, filed in the last 12 months.

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. Divisionals, etc: Complete this section only if this application is a divisional application or resulted from an entitlement dispute (see note f)

Number of earlier UK application

Date of filing
(day / month / year)

8. Is a Patents Form 7/77 (Statement of inventorship and of right to grant of a patent) required in support of this request?

Answer YES if:

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

Otherwise answer NO (See note d)

YES

Patents Form 1/77

9. Accompanying documents: A patent application must include a description of the invention. Not counting duplicates, please enter the number of pages of each item accompanying this form:

Continuation sheets of this form	0
Description	6
Claim(s)	3
Abstract	1
Drawing(s)	2 + 2 <i>ll</i>

10. If you are also filing any of the following, state how many against each item.

Priority documents	0
Translations of priority documents	0
Statement of inventorship and right to grant of a patent (Patents Form 7/77)	0
Request for a preliminary examination and search (Patents Form 9/77)	1
Request for a substantive examination (Patents Form 10/77)	0
Any other documents (please specify)	0

11. I/We request the grant of a patent on the basis of this application.

Signature(s)

A. Booth

Date 25/03/2004

12. Name, daytime telephone number and e-mail address, if any, of person to contact in the United Kingdom

Andrew Booth
(01276) 807612

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered YES in part 8, a Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- Part 7 should only be completed when a divisional application is being made under section 15(4), or when an application is being made under section 8(3), 12(6) or 37(4) following an entitlement dispute. By completing part 7 you are requesting that this application takes the same filing date as an earlier UK application. If you want the new application to have the same priority date(s) as the earlier UK application, you should also complete part 6 with the priority details.

GEAR ASSEMBLY

The present invention relates to a gear assembly for transmitting torque from one shaft to another, and to a gear suitable for use in such an assembly. The gear
5 assembly is particularly useful for transmitting torque between shafts of a vacuum pump.

With reference to Figure 1, a known vacuum pump includes a pumping chamber through which pass a pair of parallel shafts 1 supported by bearings 2. A rotor 3
10 is mounted on each shaft 1 for rotation within the pumping chamber. The rotors 3 have complementary pumping profiles, which may be Roots, Northey (or "claw") or screw. In use, when a motor 4 is driving one of the shafts 1, the other shaft is rotated synchronously with that shaft by means of the meshed timing gears 5. The rotors 3 are so profiled that fluid to be pumped is drawn into an inlet of the
15 pumping chamber and exits from the pumping chamber via an outlet.

Figure 1 illustrates three different pumping configurations. In Figure 1(a), the rotors 3 are mounted between the bearings 2 and the timing gears 5 are provided at the motor-driven end of the pump. In Figure 1(b), the timing gears 5 are
20 provided at the other end of the pump, and Figure 1(c) illustrates a configuration using cantilevered rotors.

Transmission of torque through the meshed gears 5 is affected by gear eccentricity. Gear eccentricity results in an oscillating drive torque, which would
25 normally be constant with concentric gears. In the case of high inertia, lightly loaded, rotating machinery driven by gears with typical manufacturing eccentricity tolerances, the magnitude of the oscillating drive torque can exceed the steady state drive torque. As a result, the gears leave mesh, which can provoke high frequency tooth-to-tooth slapping, a characteristic noise frequently encountered in
30 lightly loaded rotating machinery.

Pump design has been improved to reduce friction and power consumption. Consequently the required steady state drive torque has reduced and thus rotating machinery has become increasingly prone to eccentricity induced torsional vibrations and related noise problems.

5

It is an aim of at least the preferred embodiment of the present invention to reduce such torsional vibrations and noise by accommodating typical gear eccentricities.

10

In one aspect, the present invention provides a gear assembly for transmitting torque from one shaft to another, the gear assembly comprising two intermeshing gears mounted on respective shafts, one of the gears comprising a hub member for receiving one of the shafts, a toothed annular member mounted for rotation with the hub member, and means provided between the hub member and the annular member having a stiffness capable of reducing torsional vibrations and noise induced during rotation of the gears by eccentricity of at least one of the gears.

15

20

The means for inhibiting torsional vibrations and noise preferably comprises a resilient coupling between the hub member and the annular member. This coupling is preferably located between opposing surfaces of the members. In the preferred embodiment, the resilient coupling is located within a drive mechanism for transferring torque between the members. For example, one member may comprise one or more recesses each for receiving a detent of the other member for transferring torque between the members, the resilient coupling being located between opposing surfaces of the or each recess and detent.

25

30

The means for inhibiting torsional vibrations and noise thus preferably comprises at least one resilient member located between opposing surfaces of the members. In the preferred embodiment, a plurality of resilient members are each located between respective opposing surfaces of the members.

The resilient members may be conveniently provided by a number of springs, for example, metal torsional springs or translational springs including flat, disc and coil springs acting along a tangential line within the radius of the member.

Alternatively, repelling magnets could be used with the resulting stiffness being proportional to the magnetic flux. Finally in some applications use of viscoelastic materials may be appropriate.

Providing means such as a spring between the hub member and the annular member can allow the torsional stiffness of the gear to be controlled.

By providing a spring between the members the inertia that is accelerated and decelerated due to eccentricity is reduced. As the gear is accelerated, the spring is designed to compress so that the shaft can remain at a constant speed. This isolation of the shaft from eccentricity-induced gear acceleration reduces the oscillations in drive torque and will increase the eccentricity at which the gears will leave mesh.

In the event of an external torque other than that resulting from gear eccentricity causes the gears to leave mesh, the spring will act to absorb the impact that occurs as the gears come back into mesh and thus act to bring the assembly back to the linear, in-mesh, operating region. In support of this argument, non-linear analysis of tooth-to-tooth slapping has shown that the gears can only leave mesh if the overall torsional stiffness is above a certain level. In other words, low torsional stiffness rotating machinery ('weak shafts') would always remain in mesh.

This aspect of the invention extends to a vacuum pump comprising at least two shafts connected together by a gear assembly as aforementioned. For example, a high-speed Roots blower vacuum pump includes Roots profile rotors rotating in a pumping chamber with a 1:1 gear ratio. Torsional vibrations between the gears can be a problem when operating at maximum speed and ultimate pressure (the best vacuum achievable by the pump). The noise generated has been shown to depend on gear eccentricity, and is present with the available manufacturing gear wheel tolerances. An experimental prototype gear according to the invention

fitted to the driven shaft has been shown to eliminate gear tooth-to-tooth slapping with gear eccentricities that normally result in a pump prone to this noise problem.

5 In another aspect the present invention provides a gear for transmitting torque from one shaft to another, the gear comprising a hub member for receiving one of the shafts, a toothed annular member mounted for rotation with the hub member, and means provided between the hub member and the annular member having a stiffness capable of reducing torsional vibrations and noise induced during use by the eccentricity of the annular member.

10

A further aspect of the invention provides use of at least one spring in a gear of a gear assembly to reduce torsional vibrations and noise induced during rotation of the gears by the eccentricity of at least one of the gears.

15 Preferred features of the present invention will now be described, by way of example only, with reference to the accompanying drawings, in which:

Figure 1 illustrates schematically three known pump configurations;

20 Figure 2 is a cross-section of a gear suitable for use in any of the pumps of Figure 1; and

Figure 3 is a cross-section illustrating the mechanism for transmitting torque between the hub member and annular member of the gear of Figure 2.

25

With reference to Figure 3, a gear 10 suitable for use in any of the vacuum pumps shown in Figure 1 or in any other lightly loaded, high inertia rotating machine comprises a hub member 12 for receiving a shaft of the pump and an annular member 14 mounted for rotation with the hub member 12 and having peripheral
30 teeth 16. The shaft received by the hub member 12 may be either a drive shaft or a driven shaft of the pump. A bearing assembly 18 is carried by the bore of the annular member 14 and the shaft.

In use, the peripheral teeth 16 of the annular member 14 are in meshing engagement with the corresponding teeth of another gear having a 1:1 gear ratio with the gear 10, similar to the timing gears 5 shown in Figure 1.

5

A drive mechanism for transmitting torque between the members 12, 14 is provided by a plurality of detents provided around a surface perpendicular to the rotational axis of one of the members which enter respective recesses provided around the facing axial surface of the other member. In the embodiment shown in
10 Figure 3, detents 20 are provided on the annular member 14 and recesses 22 are provided on the hub member 12, although this could be the other way around, with the detents being provided on the hub member and the recesses provided on the annular member.

15 As shown in Figure 4, flat springs 24a, 24b are located within each recess 22 between the facing radial surfaces 26, 28 of the detent 20 and recess 22. The springs 24a, 24b have a stiffness chosen to substantially inhibit torsional vibrations and noise induced under lightly loaded conditions by eccentricity of either the annular member 14 or of the gear meshing with the teeth 16 of the annular
20 member 14. The springs 24a, 24b also provide absorption of any tooth-to-tooth impact resulting from external disturbances.

Under lightly loaded conditions, as experienced by a pump operating at ultimate
25 pressure, the transmission of torque between the members 12, 14 is through one of the springs 24a, 24b provided within each recess 22. This provides a degree of resilience necessary to accommodate any gear eccentricity.

In the event of the pump being subject to higher loads where a solid drive is needed to avoid compromising the phase relationship between the driving and
30 driven shafts, the spring flattens between the facing radial surfaces 26, 28 once the angular deflection of the spring has reached a specified value above a

predetermined drive torque. This provides the necessary solid drive between the radial faces 26, 28.

5 Whilst in this embodiment flat springs have been used to control torsional stiffness, tangentially mounted disc springs or coil springs could be used instead. Alternatively, repelling magnets could be used, with the resulting torsional stiffness being proportional to the magnetic flux. In some applications, use of viscoelastic materials may be appropriate.

CLAIMS

1. A gear assembly for transmitting torque from one shaft to another,
5 the gear assembly comprising two intermeshing gears mounted on
respective shafts, one of the gears comprising a hub member for
receiving one of the shafts, a toothed annular member mounted for
rotation with the hub member, and means provided between the hub
member and the annular member having a stiffness capable of
10 reducing torsional vibrations and noise induced during rotation of the
gears by the eccentricity of at least one of the gears.
2. A gear assembly according to Claim 1, wherein the means for
15 reducing torsional vibrations and noise comprises means for
increasing the critical eccentricity of the gear.
3. A gear assembly according to any preceding claim, wherein the
means for reducing torsional vibrations and noise comprises a
20 resilient coupling between the hub member and the annular member.
4. A gear assembly according to any preceding claim, wherein the
means for reducing torsional vibrations and noise is located between
25 a radial surface of the hub member and an opposing radial surface of
the annular member.
5. A gear assembly according to any preceding claim, wherein the
means for reducing torsional vibrations and noise is located within a
drive mechanism for transferring torque between the hub member
and the annular member.
- 30 6. A gear assembly according to Claim 5, wherein one of the hub
member and the annular member comprises a recess for receiving a

detent of the other of the hub member and the annular member for transferring torque between the hub member and the annular member, the means for reducing torsional vibrations and noise being located between opposing surfaces of the recess and the detent.

5

7. A gear assembly according to Claim 6, wherein said one of the hub member and the annular member comprises a plurality of said recesses each for receiving a respective detent of the other of the hub member and the annular member, the means for reducing torsional vibrations and noise being located between opposing surfaces of each recess and detent.

10

8. A gear assembly according to any preceding claim, wherein the means for inhibiting torsional vibrations and noise comprises at least one resilient member located between opposing surfaces of the hub member and the annular member.

15

9. A gear assembly according to Claim 8, wherein the means for inhibiting torsional vibrations and noise comprises a plurality of resilient members each located between respective opposing surfaces of the hub member and the annular member.

20

10. A gear assembly according to Claim 9, wherein each resilient member comprises a spring for providing torsional resistance.

25

11. A gear assembly according to Claim 9, wherein each resilient member comprises a plurality of springs for providing torsional resistance.

30

12. A gear assembly according to Claim 9, wherein each resilient member comprises a viscoelastic member.

13. A gear assembly according to any of Claims 1 to 7, wherein the means for reducing torsional vibrations and noise comprises mutually repelling magnets provided on opposing surfaces of the hub member and the annular member.

5

14. A gear assembly according to any preceding claim, wherein the means for reducing torsional vibrations and noise is arranged to maintain the phase relationship between the shafts.

10

15. A gear assembly according to Claim 14, wherein the means for reducing torsional vibrations and noise is arranged to permit a solid drive to be established between the hub member and the annular member above a predetermined drive torque.

15

16. A vacuum pump comprising at least two shafts connected together by a gear assembly according to any preceding claim.

17. A gear for transmitting torque from one shaft to another, the gear comprising a hub member for receiving one of the shafts, a toothed annular member mounted for rotation with the hub member, and means provided between the hub member and the annular member having a stiffness capable of reducing torsional vibrations and noise induced during use by eccentricity of the annular member.

20

25

18. Use of at least one spring in a gear of a gear assembly to reduce torsional vibrations and noise induced during rotation of the gears by eccentricity of at least one of the gears.

ABSTRACT

5 A gear assembly for transmitting torque from one shaft to another comprises two
intermeshing gears mounted on respective shafts. One of the gears comprises a
hub member for receiving one of the shafts, a toothed annular member mounted
for rotation with the hub member. At least one spring provided between the hub
member and the annular member has a stiffness capable of reducing torsional
vibrations and noise induced during rotation of the gears by the eccentricity of at
10 least one of the gears.

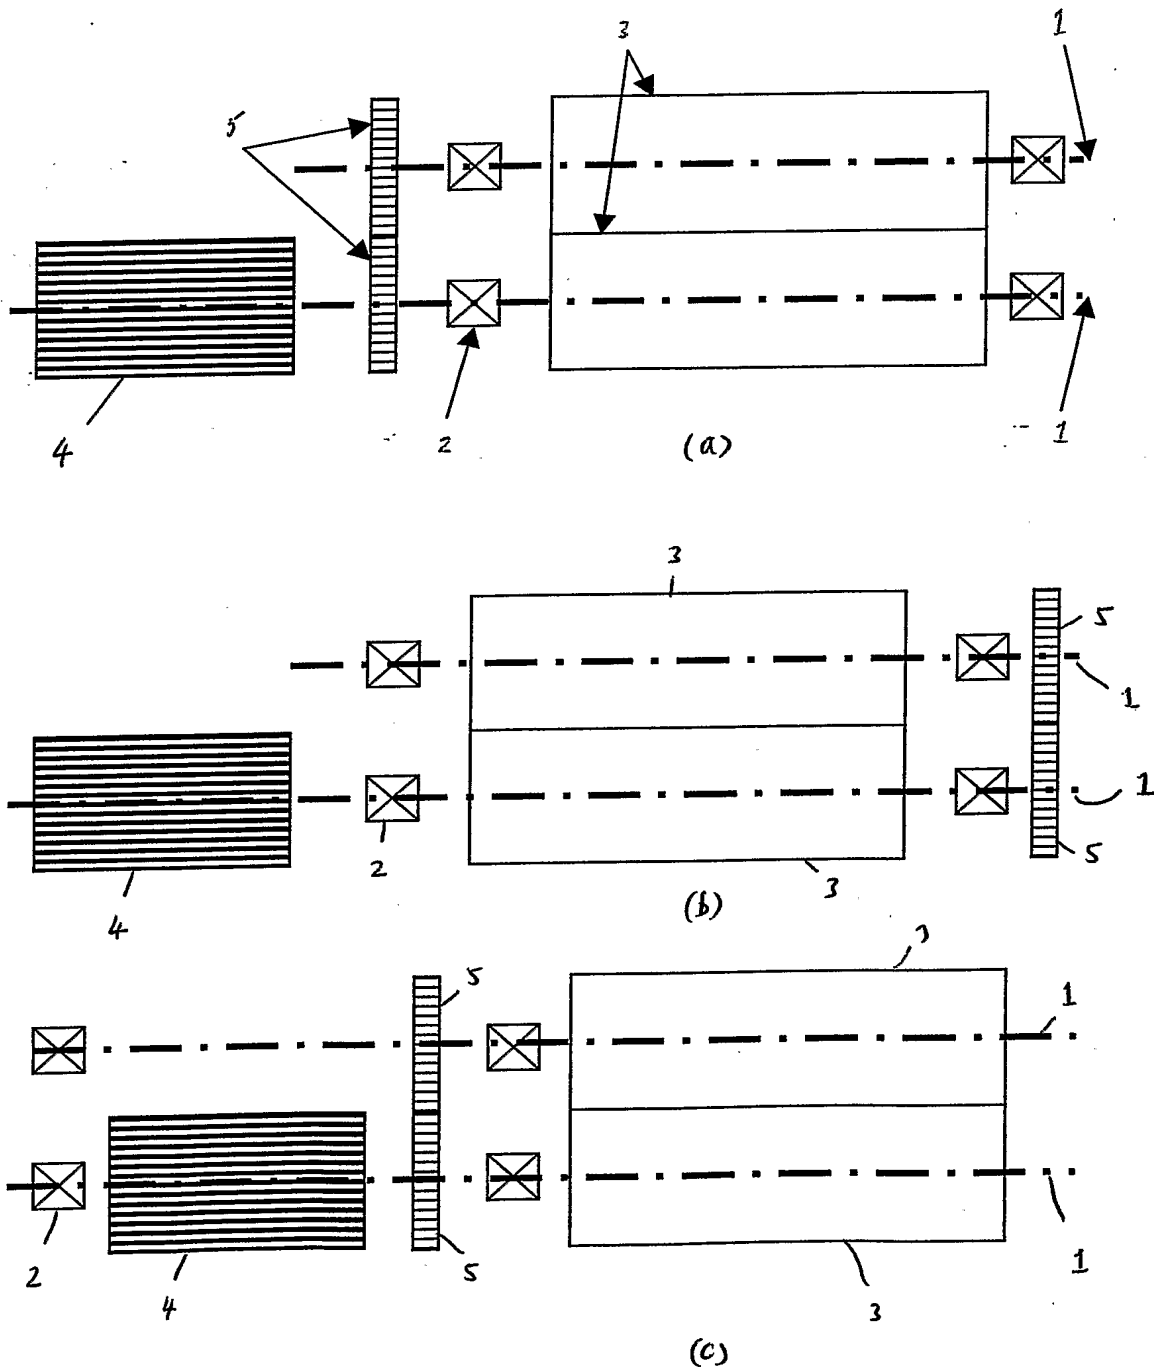


FIGURE 1



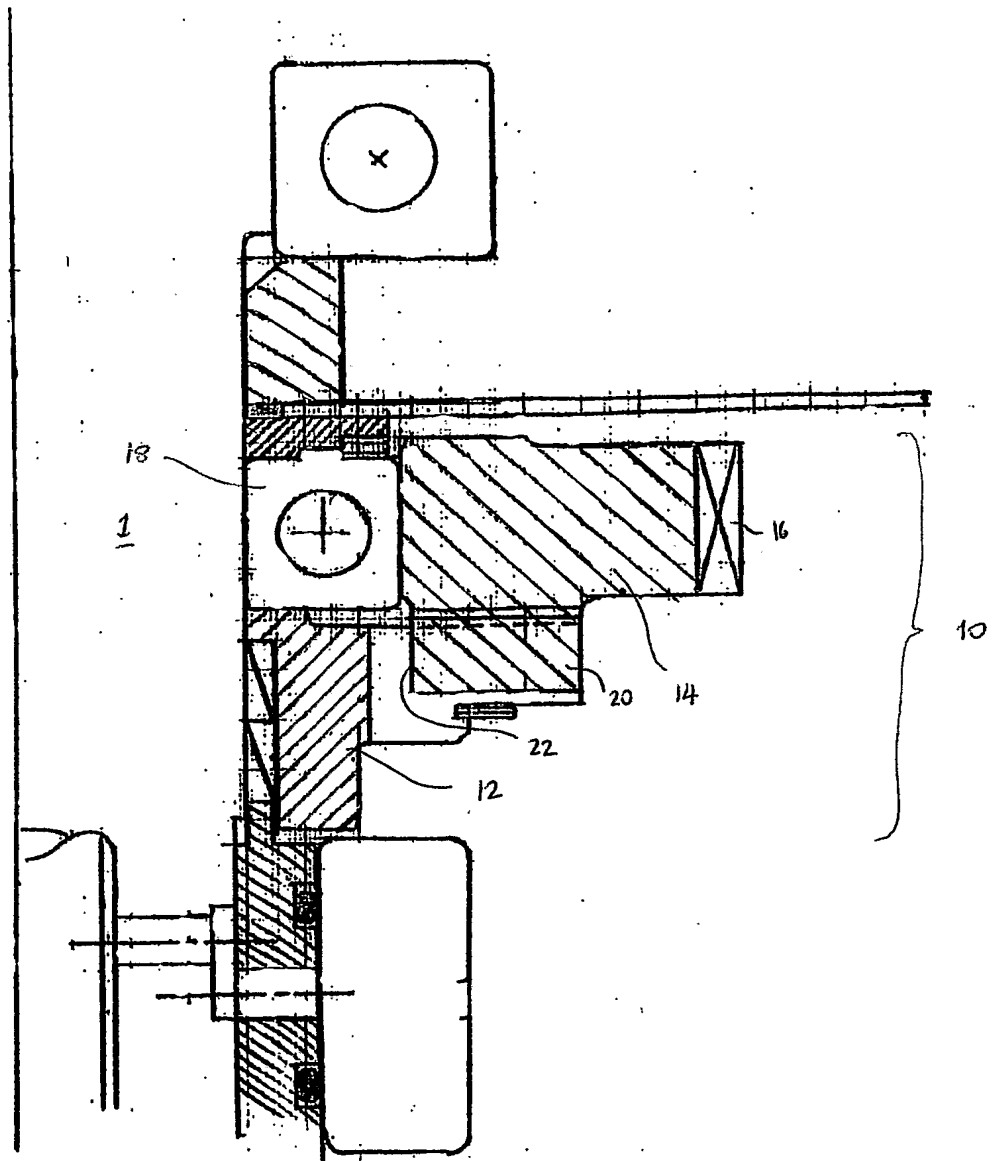


FIG. 2

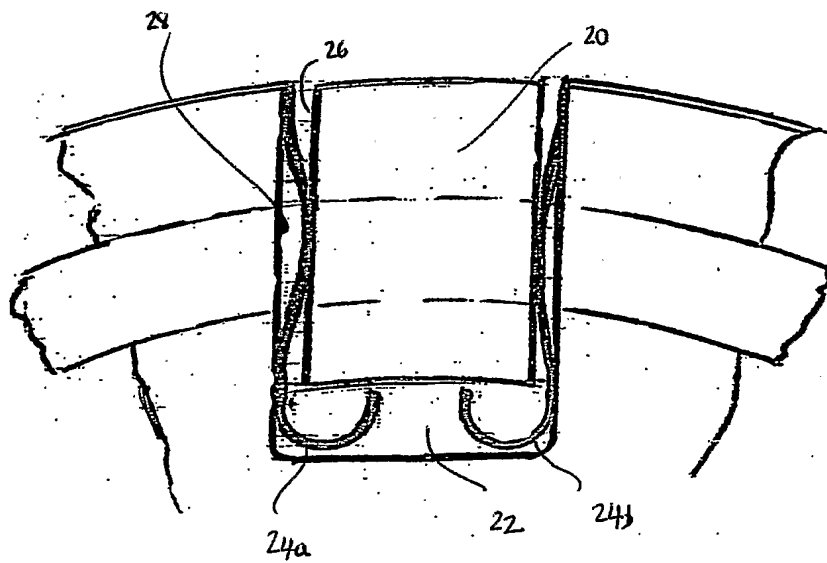


FIG. 3

THE PATENT OFFICE

03 MAY 2005

Receiving Unit
Innovation and Unit